

GGQD-042型摇臂悬挂气动打标机

Pneumatic Marker I series(With Rocker Arm)

该机型具有标准式气动打标机的全部功能：

专机特点：由于打标头悬挂在立柱的摇臂上，配上平衡器，打标头几乎没有重量，但可以在摇臂的转动范围内定位打标。

The model has a standard pneumatic marking machine all of the features:

Plane Features: As the marking head hanging on the column rocker, coupled with the balance Device, marking the first little weight, but can be positioned within the range of rotation marking rocker.

广泛应用于钢铁、汽车、石油化工、工程机械等行业：

例如：较长的或较重的石油管道或接头打标。

Widely used in the steel, automobile, petrochemical, mechanical engineering and other industries:

For example: a longer or heavier petroleum pipe or fittings marking.

GGQD-026型打标头旋转气动打标机

Marking Head Rotation Pneumatic Marker

该机特点：通过打标头的旋转，从而在圆形工件上打印标记。


The machine features: by marking the first rotation, resulting in a circular piece printed tag.

在石油化工、汽车、工程机械等行业应用较多。

例如：很重的石油管道或接头打标。

In the petrochemical, automotive, mechanical engineering and other industries used more often.

For example: heavy oil pipe or fittings marking.

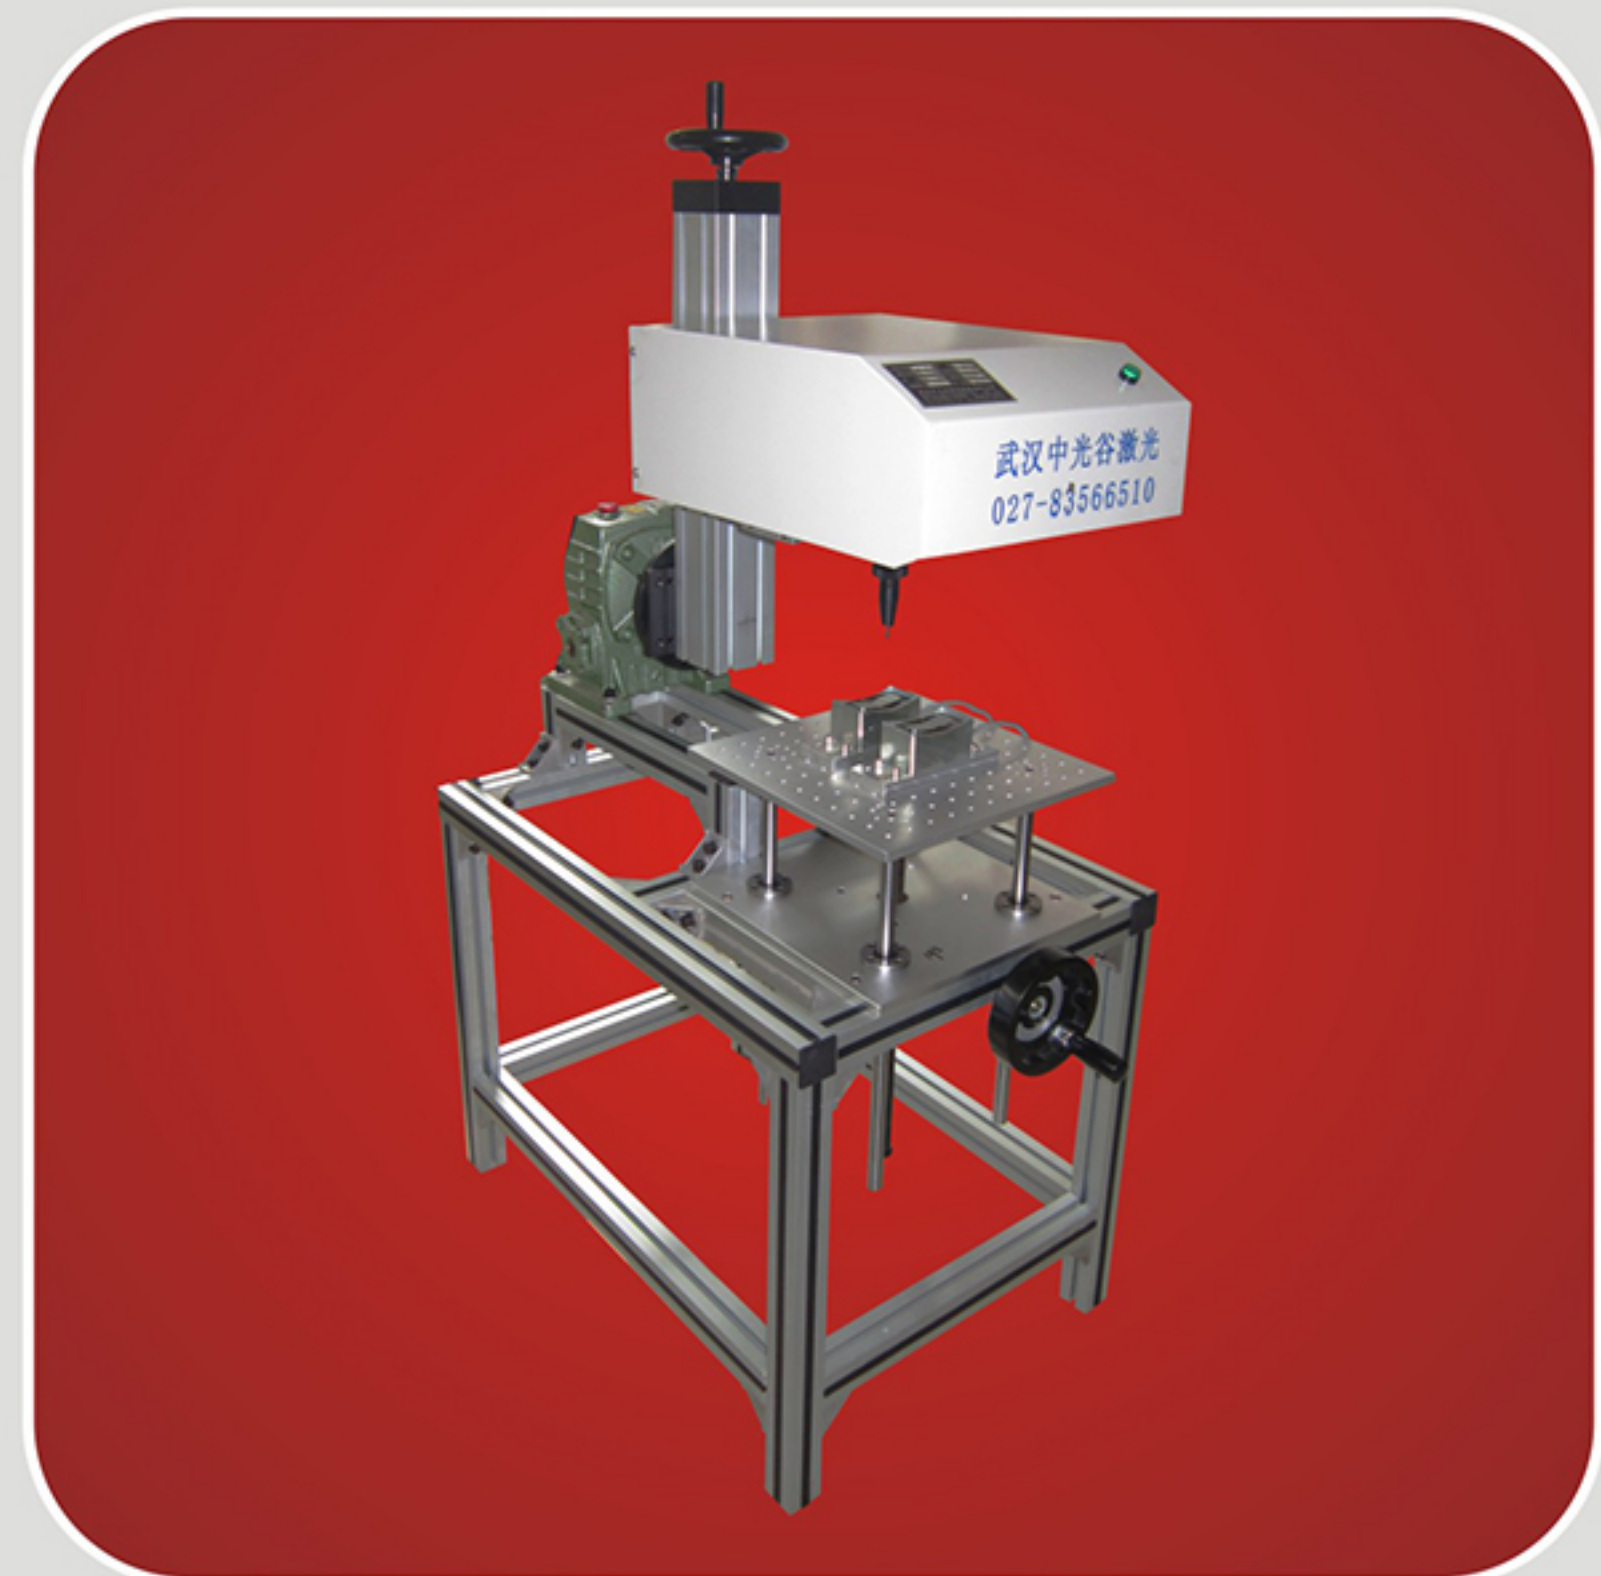

● 技术参数

型号	GGQD-042	GGQD-026
控制形式	全封闭控制柜	
打标幅面	150x100mm	150x100mm
	140x20mm	200x100mm
	150x50mm	
打标深度	0.1-2mm(视材料)	
打标速度	50-80mm/s	
附件	不带电磁吸附/带电磁吸附	
整机耗电功率	220V ± 10%/50Hz/1000W	
气源需求	0.4-0.6Mpa干燥纯净空气	

● Technical data

Model	GGQD-042	GGQD-026
Forms of control	Fully enclosed control cabinet	
Marking format	150x100mm	150x100mm
	140x20mm	200x100mm
	150x50mm	
Marking depth	0.1-2mm(according to materials)	
Marking speed	50-80mm/s	
Accessory	Without electromagnetic absorption Adsorption with electromagnetic	
Power consumed	220V ± 10%/50Hz/1000W	
Gas supply needs	0.4-0.6Mpa dry clean air	