



激光雕刻切割机系列
Laser Cutting Machine
GGDK-1060/GGDK-1260/GGDK-1290



激光雕刻切割机双头系列
Laser Cutting Machine
Double Series
GGDK-S1060/GGDK-S1260/GGDK-S1290

■ 设备性能

特制专用模具型材结构、松下伺服运动控制机系统、进口直线导轨支撑运行、金属密封进口射频二氧化碳激光管、皮带传动、通道式进料、同轴红光定位系统、刀条式铝型材工作台面、升降平台、出错报警系统、排烟除尘、吹气保护、专用软件支持PLT、BMP、DXF、DST、AI、T100等多种格式文件输出。

■ Equipment Performance

Moduled steel frame structure to reduce the mechanical trouble effectively, Panasonic servo control system, imported straight track to support motion, imported metal sealed C02 radio-frequency tube, belt transmission, routeway feeding, coaxial infrared ray indicating position system, anodized aluminium lamella table, up&down worktable, air cooling, Error alarm system, exclusion of dust and smoke, inflatable protection, the proprietary software which supports the output of various files format: PLT, BMP, DXF, AI, etc.

■ 应用领域

广告行业、装饰装潢行业、家具行业、模型制作行业、工艺品行业。广泛适用于亚克力、有机板、双色板、木板、竹制品、纸张、玻璃等非金属材料和各种文字、图形、图像、商标等的精细切割、镂空和雕刻、刻花。

■ Applicable fields


Advertising industry, decoration, furniture, model manufacturing, and handicraft industry. The machine is widely applied in the fine engraving, cutting and hollowing out on nonmetallic materials like acrylic, organic board, double color plate, plank, bamboo product, paper, glass, etc. With all kinds of characters, graphs, images, trademarks and so on.

■ 选配

红光定位、旋转机构。

■ Optional configuration

Red-light locating system; Rotary device.

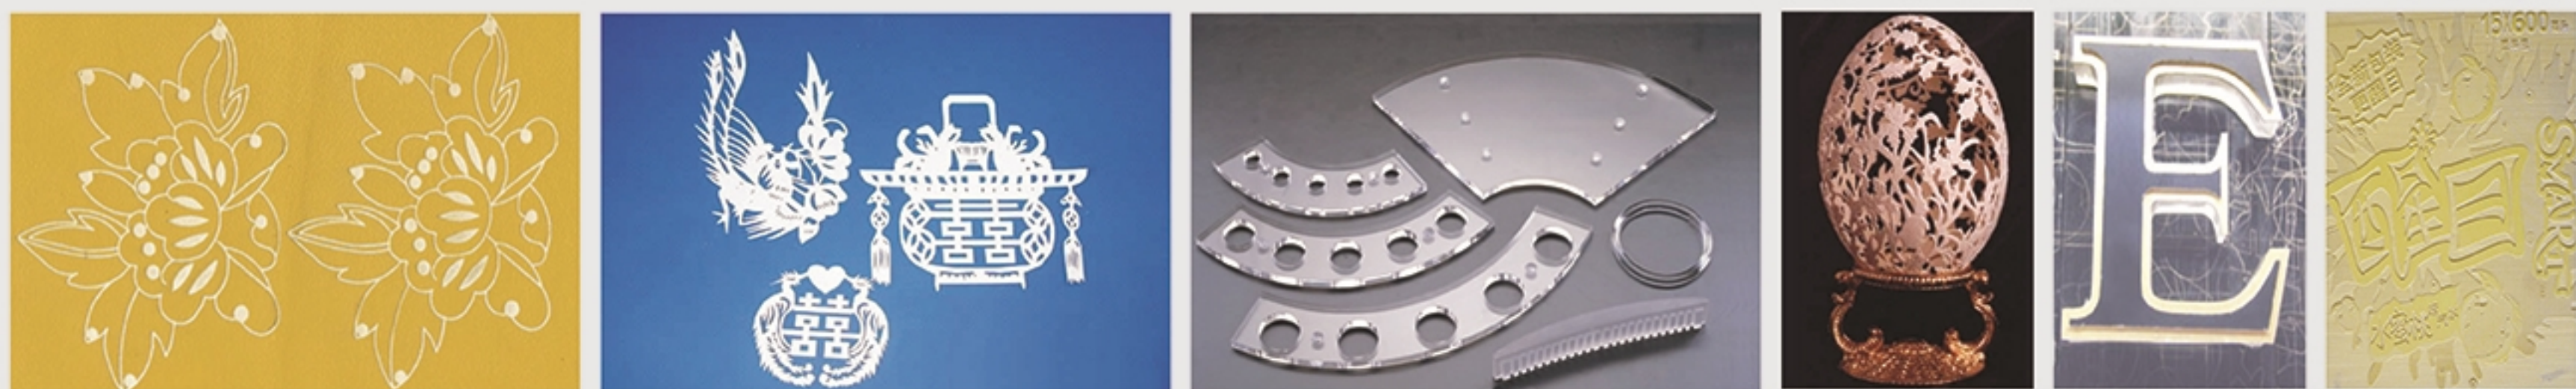

型号规格(Type specification)	GGDK-1060/GGDK-1260/GGDK-1290		GGDK-S1060/GGDK-S1260/GGDK-S1290	
激光功率(Laser power)	75W	100W	60W	80W
接口方式(Connecting way)	PCI卡/USB接口 联机/脱机 直读U盘(PCI/USB Online/offline reading U flash)		USB接口 联机/脱机 直读U盘(USB online / offline reading U flash)	
工作台幅面(Working platform size)	1000x600mm 1250x600mm 1250x900mm			
切割速度(Cutting speed)	≤ 100 mm/s		≤ 500 mm/s	
雕刻速度(Engraving speed)	≤ 1000 mm/s			
重复定位精度(The accuracy of repeated orientataion)	≤ ± 0.005mm		≤ ± 0.025mm	
冷却方式(Cooling way)	风冷/循环水冷(Air cooling/Circulation water cooling)		循环水冷(Circulation water cooling)	
工作电源(Power supply)	220V/50Hz/1kVA			
整机重量(Net weight)	150kg/184kg/200kg		399kg/430kg/450kg	
外形尺寸(Dimension)	1240x1200x740/1520x1200x850/1580x1240x970mm		1670x1450x1280mm/1920x1470x1220/1920x1420x1280	